








LoGrip is a low profile, metal to wood roofing screw that has a refined appearance compared to the traditional hex head roofing screw. Features include T25 star drive, Hi-Lo threads, is mechanically galvanized for corrosion protection, and has an EPDM rubber washer that incorporates a secure seal. LoGrip provides a good grip to hold your metal roofing in place by having a type 17 point for easy penetration. This low-profile fastener is also available in 1" without a washer for interior liner panels.

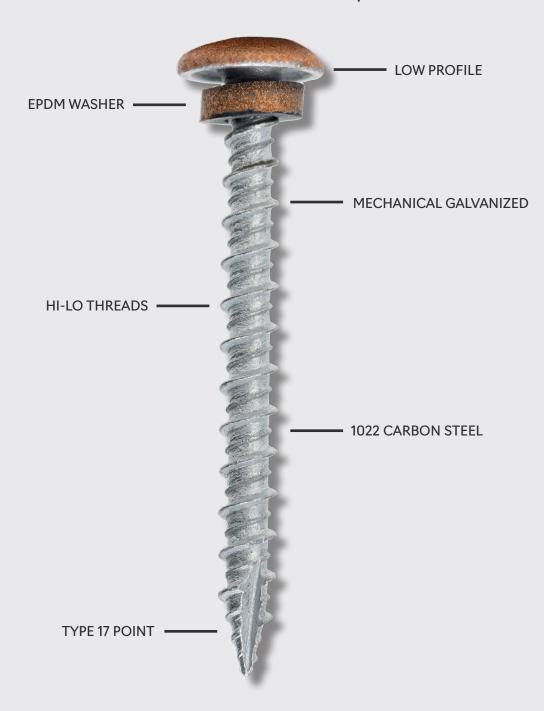







* NO WASHER

ITEM#	DESCRIPTION	HEAD STYLE	DRILL POINT	PCS/BOX	LB/BOX
101LGNW	#10 × 1"*	T25	T-17	3,000	24.6
101LG	#10 × 1"	T25	T-17	3,000	25.5
10112LG	#10 × 1 - 1/2"	T25	T-17	2,500	26.0
102LG	#10 × 2"	T25	T-17	2,000	25.6

PULL OUT STRENGTH

SUBSTRATE	PENETRATION	PULL OUT STRENGTH	
3/4" Ply	Full	472	
1/2" Ply	Full	357	
7/16" OSB	Full	200	
2 x Yellow Pine	1"	675	
2 x Spruce Pine Fir	1"	692	
2 x Spruce Pine Fir	1 - 1/2"	1,006	

SHEAR				
1,880				
TENSILE				
2,617				
TORSIONAL				
190				



PULL OVER STRENGTH

SUBSTRATE	GAUGE	THICKNESS	PULL OVER STRENGTH
AZ55 Galvalume	29	0.014	451
AZ55 Galvalume	26	0.018	622
AZ55 Galvalume	24	0.024	878

ALSO AVAILABLE:















