

Metalgrip™

W/WASHER


#3
Drill Point

#12

AVAILABLE IN
ANY COLOR


QUICK
SHIPPING

Ensure a superior grip by using a specialty screw from the Metalgrip™ family on your next steel project. Secure metal to metal purlins up to a 0.210 steel thickness with the #3 self-drill point.

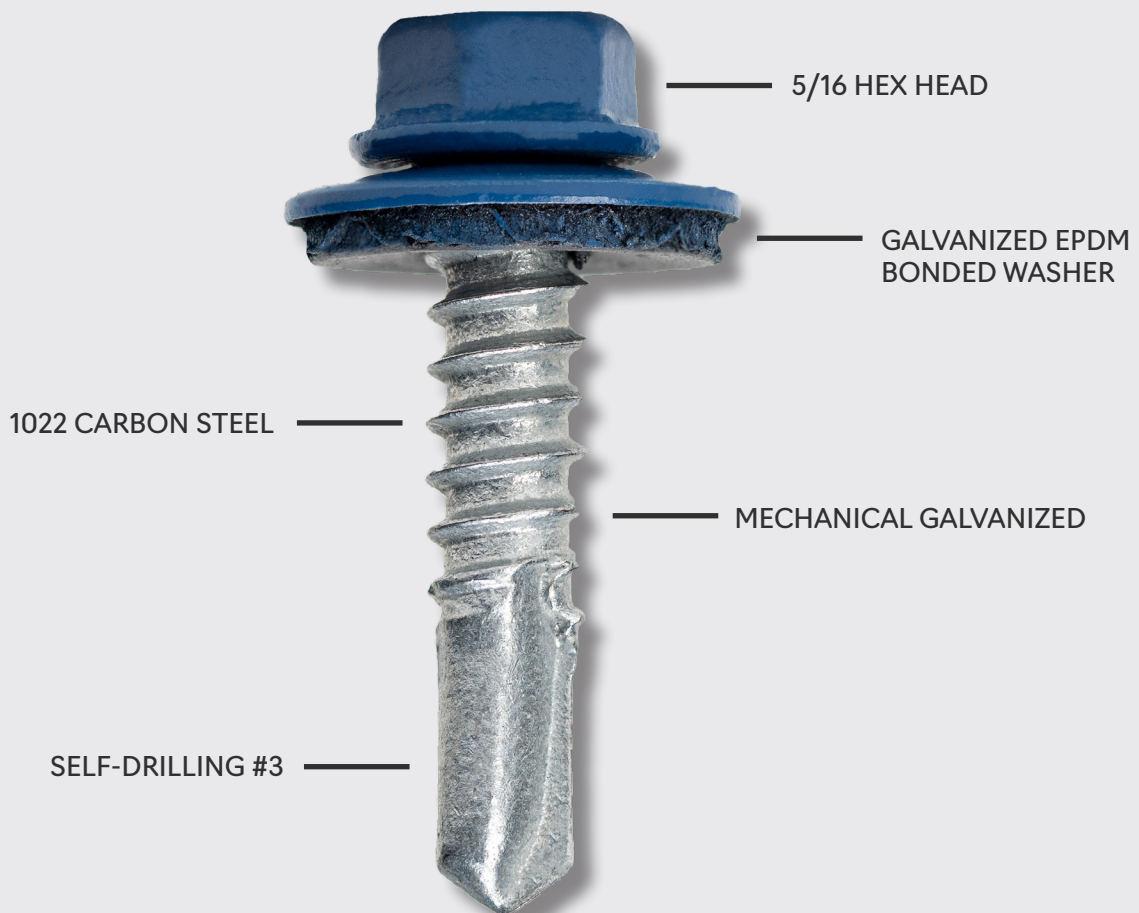

Metalgrip™

W/WASHER



ITEM #	DESCRIPTION	HEAD STYLE	DRILL POINT	PCS/BOX	LB/BOX
121434SD	#12 - 14 x 3/4"	5/16 Hex	#3	2,500	27.9
12141SD	#12 - 14 x 1"	5/16 Hex	#3	2,500	31.3
1214114SD	#12 - 14 x 1 - 1/4"	5/16 Hex	#3	2,500	35.6
1214112SD	#12 - 14 x 1 - 1/2"	5/16 Hex	#3	2,000	36.4
12142SD	#12 - 14 x 2"	5/16 Hex	#3	1,500	29.3
1214212SD	#12 - 14 x 2 - 1/2"	5/16 Hex	#3	1,000	23.9
12143SD	#12 - 14 x 3"	5/16 Hex	#3	500	13.7

PULL OUT STRENGTH

SUBSTRATE	PULL OUT STRENGTH
12 ga HRS	1,243
14 ga HRS	772
16 ga HRS	617
18 ga HRS	456
20 ga HRS	318

SHEAR
2,660
TENSILE
4,288
TORSIONAL
137



PULL OVER STRENGTH

SUBSTRATE	GAUGE	THICKNESS	PULL OVER STRENGTH
AZ55 Galvalume	29	0.014	422
AZ55 Galvalume	26	0.018	668
AZ55 Galvalume	24	0.024	1,010
AZ55 Galvalume	22	0.030	1,220

ALSO AVAILABLE:



Metalgrip™
#5



Metalgrip™
#5 W/O WASHER



ProZ SD
#3



ProZ SD
#5