


ReGrip™

#12

AVAILABLE IN
ANY COLOR

QUICK
SHIPPING

Choose from mechanical galvanized or 300 series stainless steel options in 1-1/2", 2" or 2-1/2" sizes when looking to replace nails or screws that have failed. The sharp point drills easily and the oversized 5/8" EPDM washer seals tightly. Fasten aluminum panels effortlessly using the SS screw. Quick ship colors available or match to your roof color.

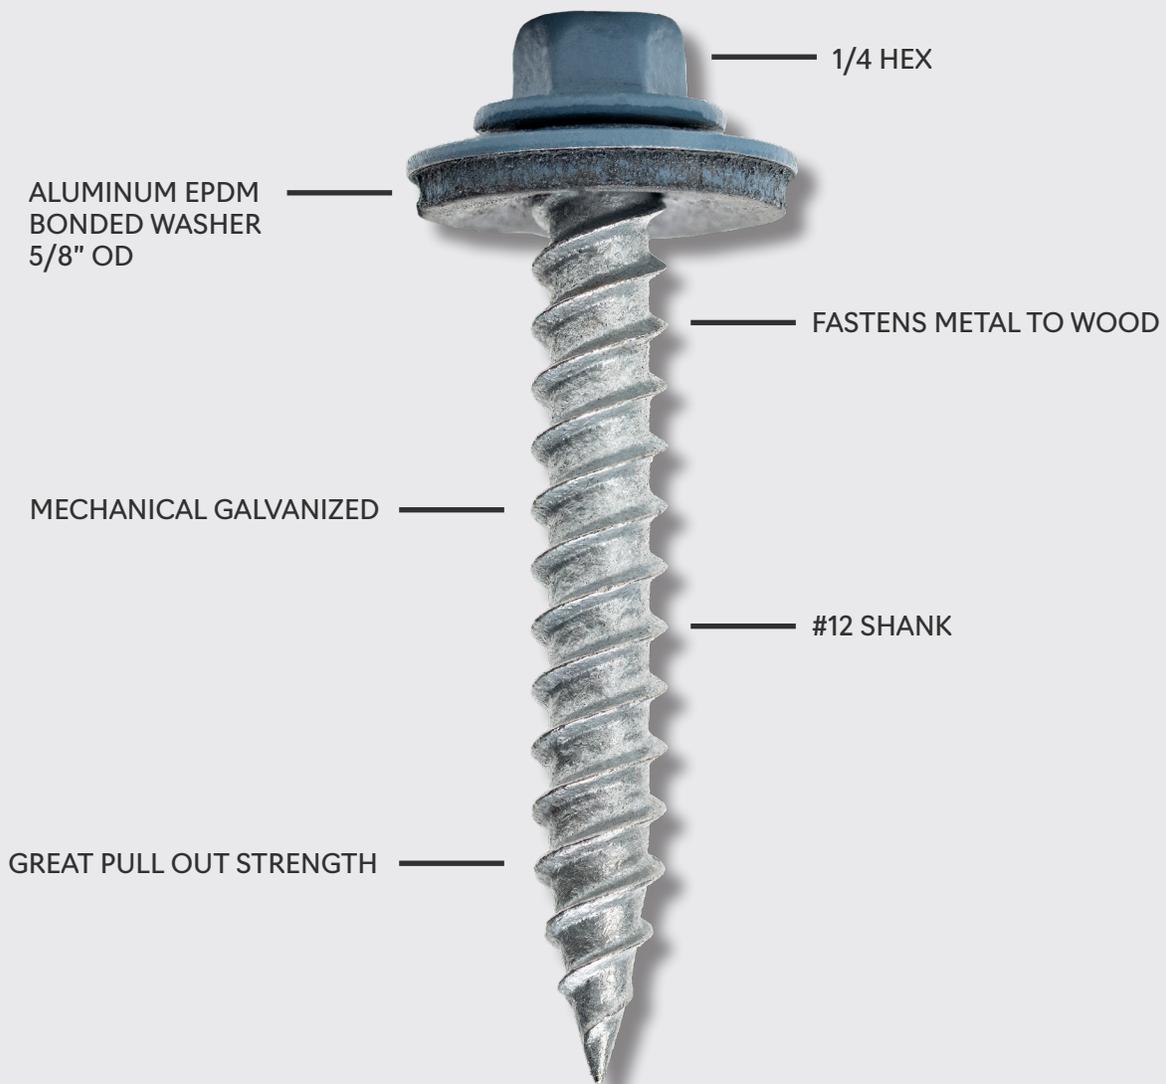

ReGrip™

#12



ITEM #	DESCRIPTION	HEAD STYLE	DRILL POINT	PCS/BOX	LB/BOX
12112RG	#12 x 1 - 1/2"	1/4 Hex	SP	2,000	30.6
122RG	#12 x 2"	1/4 Hex	SP	1,500	28.7
12212RG	#12 x 2 - 1/2"	1/4 Hex	SP	1,000	22.6

PULL OUT STRENGTH

SUBSTRATE	PENETRATION	PULL OUT STRENGTH	SHEAR
3/4" Ply	Full	545	2,650
1/2" Ply	Full	302	
7/16" OSB	Full	189	TENSILE
2 x Yellow Pine	1"	764	3,332
2 x Spruce Pine Fir	1"	661	TORSIONAL
2 x Spruce Pine Fir	1 - 1/2"	1,037	157



PULL OVER STRENGTH

SUBSTRATE	GAUGE	THICKNESS	PULL OVER STRENGTH
AZ55 Galvalume	29	0.014	484
AZ55 Galvalume	26	0.018	666
AZ55 Galvalume	24	0.024	942

ALSO AVAILABLE:



Fastgrip™
#14



Fastgrip™
MINI-DRILLER



Fastgrip™



TuffGrip™

ReGrip™


STAINLESS STEEL

#12

AVAILABLE IN
ANY COLOR

QUICK
SHIPPING

Choose from mechanical galvanized or 300 series stainless steel options in 1-1/2", 2" or 2-1/2" sizes when looking to replace nails or screws that have failed. The sharp point drills easily and the oversized 5/8" EDPM washer seals tightly. Fasten aluminum panels effortlessly using the SS screw. Quick ship colors available or match to your roof color.

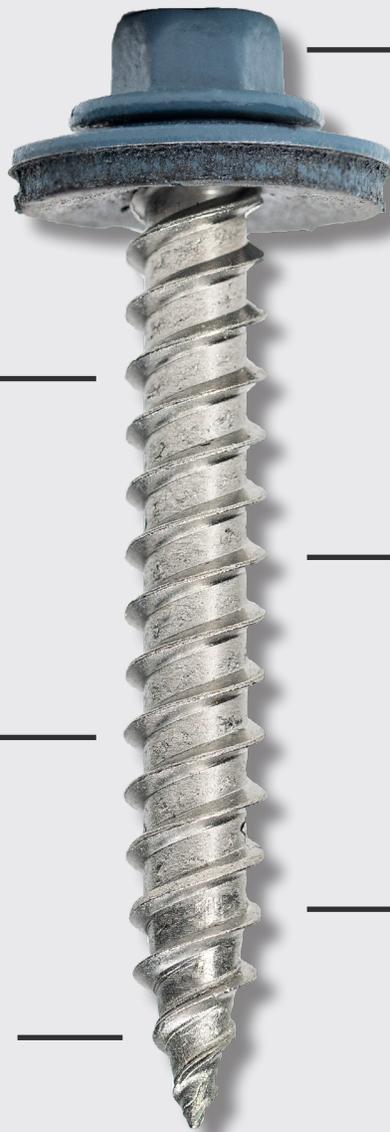

1/4 HEX

ALUMINUM EPDM
BONDED WASHER
5/8" OD

FASTENS METAL TO WOOD

IDEAL FOR ALUMINUM PANELS

300 SERIES STAINLESS STEEL

#12 SHANK

GREAT PULL OUT STRENGTH

ReGrip™

STAINLESS STEEL

#12



QUICK SHIPPING

ITEM #	DESCRIPTION	HEAD STYLE	DRILL POINT	PCS/BOX	LB/BOX
12112RGSS	#12 x 1 - 1/2"	1/4 Hex	SP	2,000	31.4
122RGSS	#12 x 2"	1/4 Hex	SP	1,500	28.7
12212RGSS	#12 x 2 - 1/2"	1/4 Hex	SP	1,000	22.8

PULL OUT STRENGTH

SUBSTRATE	PENETRATION	PULL OUT STRENGTH	SHEAR
3/4" Ply	Full	528	2,000
1/2" Ply	Full	338	
7/16" OSB	Full	191	TENSILE
2 x Yellow Pine	1"	756	2,206
2 x Spruce Pine Fir	1"	745	TORSIONAL
2 x Spruce Pine Fir	1 - 1/2"	926	98



PULL OVER STRENGTH

SUBSTRATE	GAUGE	THICKNESS	PULL OVER STRENGTH
AZ55 Galvalume	29	0.014	427
AZ55 Galvalume	26	0.018	622
AZ55 Galvalume	24	0.024	952

ALSO AVAILABLE:



Fastgrip™
#14



Fastgrip™
MINI-DRILLER



Fastgrip™



TuffGrip™