


TuffGrip™

#12

AVAILABLE IN
ANY COLOR

QUICK
SHIPPING

The Tuffgrip™ #12 is the right screw to get a good grip in metal to OSB applications. The #12 shank and aggressive threads means greater pull-out strength. The non-bonded complete cover washer perfectly seals out the elements, preserving the washer integrity.

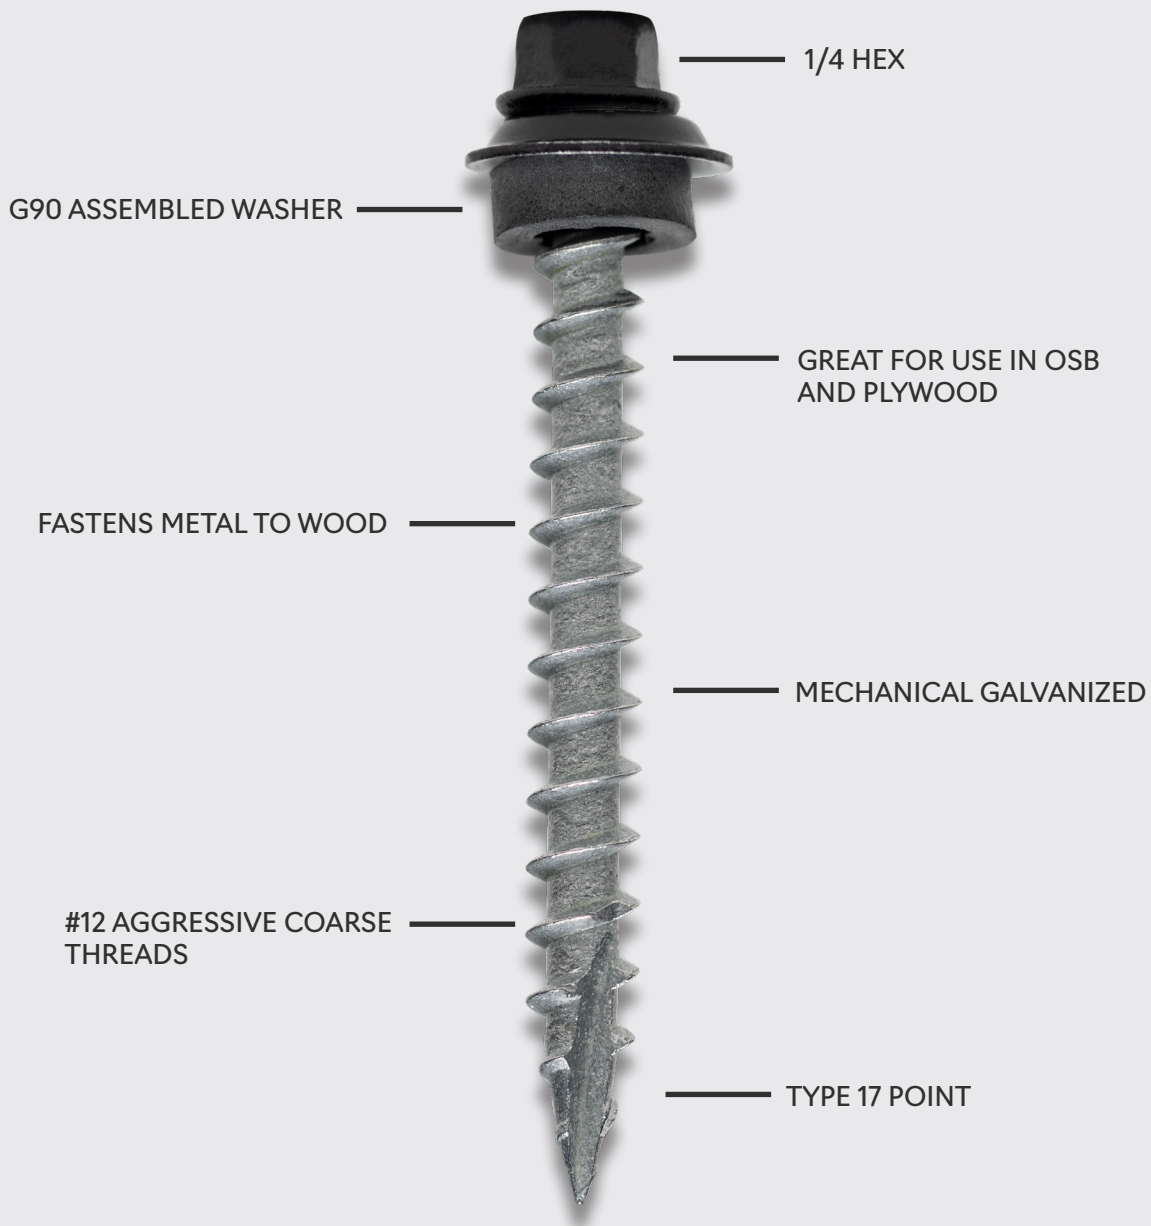

ITEM #	DESCRIPTION	HEAD STYLE	DRILL POINT	PCS/BOX	LB/BOX
121TG	#12 x 1"	1/4 Hex	T-17	3,000	22.4
12112TG	#12 x 1 - 1/2"	1/4 Hex	T-17	2,500	23.0
122TG	#12 x 2"	1/4 Hex	T-17	2,000	21.3
12212TG	#12 x 2 - 1/2"	1/4 Hex	T-17	1,000	16.8

PULL OUT STRENGTH

SUBSTRATE	PENETRATION	PULL OUT STRENGTH
3/4" Ply	Full	429
1/2" Ply	Full	426
7/16" OSB	Full	265
2 x Yellow Pine	1"	885
2 x Spruce Pine Fir	1"	441
2 x Spruce Pine Fir	1 - 1/2"	769

SHEAR
1,780
TENSILE
2,630
TORSIONAL
88



PULL OVER STRENGTH

SUBSTRATE	GAUGE	THICKNESS	PULL OVER STRENGTH
AZ55 Galvalume	29	0.014	516
AZ55 Galvalume	26	0.018	671
AZ55 Galvalume	24	0.024	870

ALSO AVAILABLE:



Fastgrip™
MINI-DRILLER



ProCap



Fastgrip™



ProZ™
MINI-DRILLER