


Fastgrip™ MINI-DRILLER™



The Fastgrip™ #10 Hi-Lo MINI-DRILLER™ has all of the specs that make the Fastgrip™ #10 Hi-Lo the go-to fastener, but with the added MINI-DRILLER™ point. The MINI-DRILLER™ makes easy work of driving through metal panels, while the Hi-Lo thread provides superior pull-out strength in metal to wood applications.

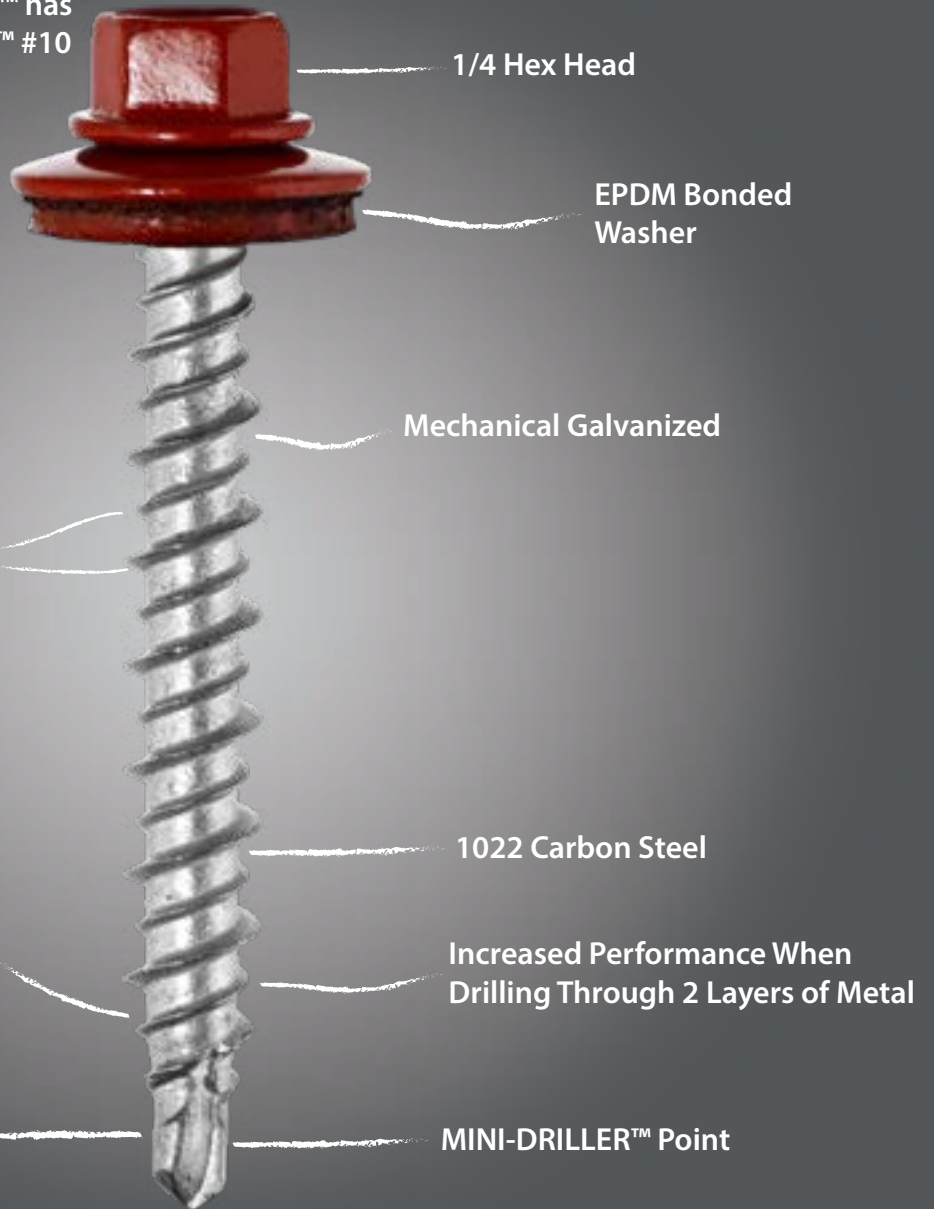

Fastgrip™ MINI-DRILLER™

Item #	Description	Head Style	Drill Point	Pcs/Bx	Lb/Box
101MD	#10 x 1"	1/4 Hex	RP	3000	26.8
10112MD	#10 x 1-1/2"	1/4 Hex	RP	2500	27.9
102MD	#10 x 2"	1/4 Hex	RP	2000	27.3
10212MD	#10 x 2-1/2"	1/4 Hex	RP	1500	23.7
103MD	#10 x 3"	1/4 Hex	RP	1000	18.4



Bonded EPDM Washer

Pull Out Strength	Substrate	Penetration	Pull Out Strength
	7/16" OSB	Full	217
	1/2" Ply	Full	280
	3/4" Ply	Full	525
	2 X Yellow Pine	1"	850
	2 X Spruce Pine Fir	1"	787
	2 X Spruce Pine Fir	1-1/2"	1,285



Hi-Lo Threads

Pull Over Strength	Substrate	Gauge	Thickness	Pull Over Strength
	AZ55 Galvalume	29	0.014	398
	AZ55 Galvalume	26	0.018	667
	AZ55 Galvalume	24	0.024	767



MINI-DRILLER™ Point

Shear	Tensile	Torsional
1750	2486	80

Also Available:



Fastgrip™

#10 Hi-Lo



ProCap™



ProZ™



**ProZ™
MINI-DRILLER™**